


ECOSYS MA2100cwfx: A classic, redefined

With the new ECOSYS MA2100cwfx, we have transformed a hugely popular legacy device, making it the perfect fit for the new age of work. This compact and highly reliable A4 printer combines the best of Kyocera's ECOSYS technology with modern innovation to meet the needs of the most demanding workspaces, be they in the office or across remote locations.

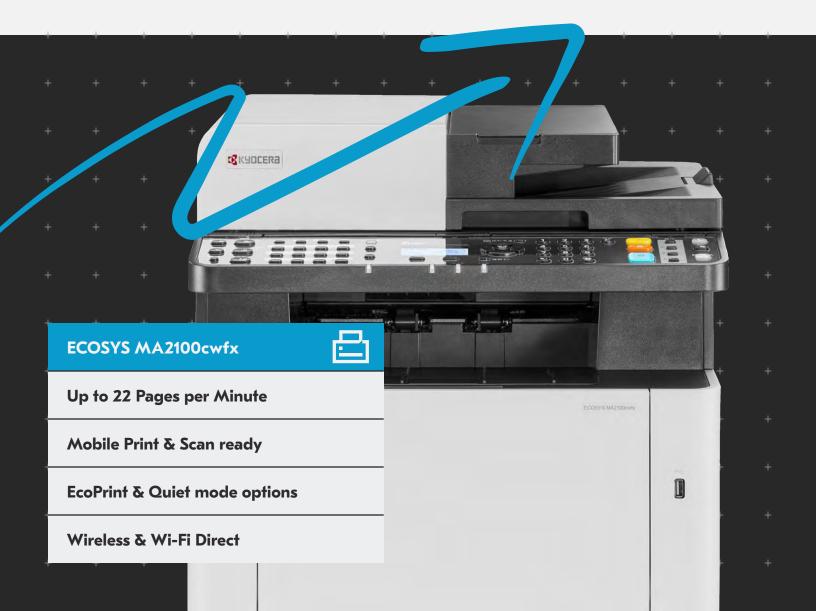

ECOSYS MA2100cwfx

BASIC SPECIFICATIONS

Configuration: Colour Multifunctional Printer — Print / Scan / Copy / Fax

Pages Per Minute: Black — Letter: 22 ppm, Legal: 18 ppm, A4: 21 ppm

Colour - Letter: 22 ppm, Legal: 18 ppm,

A4: 21 ppm

Warm Up Time: 32 Seconds or Less (Power On), 12 Seconds or Less from Sleep

First Page Out:

Weight: 57.3 lbs

Copy: 10 Seconds or Less Black, 12 Seconds or Less Colour Print: 11 Seconds or Less Black, 12.5 Seconds or Less Colour¹ **Display:** 5 Line LCD Screen with Hard Key Control Panel **Resolution:** 600 x 600 dpi, 9600 dpi equivalent × 600 dpi, 1200 x 1200 dpi¹

Memory: Standard 512MB, Upgradable to 1.5GB

Duplex: Standard Stackless Duplex Supports Statement to

Legal (5.5" x 8.5" - 8.5" x 14"), 16 lb - 32 lb Bond (60 - 120gsm)

Dimensions: 16.4" W x 16.9" D x 19.5" H

Maximum Monthly Duty Cycle: 65,000 Pages per Month
POWER CONSUMPTION

Electrical Requirements: 120V, 60Hz, 8.6A; 220 – 240V, 50/60Hz, 4.5A

Typical Electricity Consumption (TEC): 120V: 811.7 Wh/week; 220 – 240V: 730 Wh/week

Maximum (including options): 120V: 1,007 W; 220 - 240V: 1,066 W

Copying / Printing: 120V: 345 W; 220 – 240V: 345 W Ready Mode: 120V: 41 W; 220 – 240V: 41 W Sleep Mode: 120V: 1 W; 220 – 240V: 1 W Power Off: 120V: 0.2 W; 220 – 240V: 0.2 W

PAPER SUPPLY

Standard Paper Sources: Single 250 Sheet Drawer, 50 Sheet Multi-purpose Tray

Standard / Maximum Paper Sources: 2 / 3 including Multi- purpose Tray

Standard / Maximum Paper Capacity:

300 Sheets / 550 Sheets

Paper Size: Standard / Optional / Drawers: $5.5'' \times 8.5'' - 8.5'' \times 14''$ (Statement to Legal)

Paper Weight: Standard / Optional Drawers: 16 lb Bond —90 lb Index (60 — 163gsm); MPT: 16 lb Bond — 120 lb Index (60 — 220gsm)

Input Materials: Standard / Optional Drawer: Plain Paper, Bond Paper, Recycled Paper; MPT: Labels, OHP, Envelopes, Coated Paper

Standard Output Tray Capacity: 150 Sheets

PRINT SPECIFICATIONS

Standard Controller: Cortex-A9 / 800MHz
PDLs / Emulations: PRESCRIBE, PCL6 (PCL5c/PCL-XL), KPDL3
supporting AES, PDF Direct Print, XPS/OpenXPS Direct Print
Windows OS Compatibility: Windows 8.1/10/11 / Server 2012

Windows OS Compatibility: Windows 8.1/10/11 / Server 2012 /Server 2012 R2 / Server 2016 / Server 2019

Mac OS Compatibility: Apple Macintosh OS X 10.9 or higher Interfaces: Standard: 10 BASE-T/100 BASE-TX/ 1000 BASE-T, High-speed USB 2.0, 1 USB Host, Wireless LAN IEEE 802.11b/a/n. Wi-Fi Direct

Linux OS

Mobile Printing: Apple AirPrint®, KYOCERA Mobile Print,
Mopria®

Network Print and Supported Protocols: TCP/IP, IPv4, IPv6, NetBEUI, FTP, LPR, IPP, WSD Print/Scan, DHCP, DNS, Apple Bonjour, LDAP, SNMP v2/3, HTTP, SMTP, POP3, PDF Direct Print (using KYOCERA NET Direct Print utilities)

Drivers: KX Driver, KX Driver for XPS, PCL Mini Driver, KPDL Mini Driver, Network Fax Driver, TWAIN Driver, WIA Driver, MAC Driver, Linux Driver

Utilities: KYOCERA Net Direct Print, File Management Utility, KYOCERA Mobile Print, KYOCERA Print Center, KYOCERA Device Manager, KYOCERA Net Viewer, ID Register, Wi-Fi Setup Tool, Remote Work Assistant, KYOCERA Quick Scan, Status Monitor

Additional Print Features: EcoPrint; Quick Copy² and Job Storage²; Private Print³ and Proof and Hold³

SCAN SPECIFICATIONS

Scan Type: Colour and Black & White Scanner
Scan Resolution: 300 x 600 dpi, 300 dpi, 600 dpi
Scanning Functions: Scan to Folder (SMB), Scan to Email, Scan

Scanning Functions: Scan to Folder (SMB), Scan to Email, Scan to FTP, Scan to FTP over SSL, WSD Scan, Scan to USB, TWAIN/WIA Scan

File Formats: TIFF, PDF, High-compression PDF, XPS, OpenXPS, JPEG, Encrypted PDF, PDA/A-1

Scan Speeds through ADF:

Mono: Simplex @300 dpi - 30 ipm, @600 dpi - 18 ipm Colour: Simplex @300 dpi - 23 ipm, @600dpi - 6 ipm

Original Size: Through Document Processor: Statement to Legal ($5.5" \times 8.5" \times 14"$); Glass: Up to $8.5" \times 11"$

COPY SPECIFICATIONS

Image Mode: Text, Photo, Text & Photo, Graphic/Map, Printed Document Mode

Continuous Copy: 1-999 / Auto Reset to 1

Job Management: Job Accounting, 20 Department Codes,
Shortcut Kevs

Magnification / Zoom: Full Size, 7 Reduction, 5 Enlargement, Preset Ratios, 25 — 400% (in 1% increments) Additional Cooy Features: Auto Zoom

SECURITY SPECIFICATIONS

Standard: Local Authentication, Network Authentication, IPsec, SNMPv3, LDAP over SSL, IEEE 802.1x, IPP over SSL/TLS, TLS, HTTPS, FTP over SSL/TLS, SMTP over SSL/TLS, POP3 over SSL/TLS, Enhanced WSD over SSL/TLS, TLS 1.2, SMBv3, SHA-2 384

Optional: Card Authentication Kit (B)

DOCUMENT PROCESSOR

Type / Capacity: Standard Automatic Document Feeder (ADF) /50 Sheets

Acceptable Originals: Statement to Legal

(5.5" x 8.5" - 8.5" x 14")

Acceptable Weights: Simplex: 13 - 42 lb Bond (50 - 160gsm), Duplex: 13 - 32 lb Bond (50 - 120gsm)

FAX SPECIFICATIONS

Compatibility / Data Compression: ITU-T G3 Fax / MMR, MR, MH, JBIG

Transmission Speed / Modem Speed: 3 Seconds or Less / 33.6Kbps

Fax Memory: 3.5MB

Fax Functions: Simplex Transmission / Duplex Reception, One Touch Dial (22 numbers, a maximum of 22 destinations can be registered with physical 11 numbers key & shift key), Quick Dial (100 numbers), Sequential Broadcast (100 numbers), Density Adjustment, Original Image Quality, Continuous Scan, Timer Send,

Fax Reports

PAPER HANDLING OPTION

PF-5110: 250 Sheet Paper Feed Drawer
Paper Size / Weight: 5.5" x 8.5" - 8.5" x 14"
(Statement to Legal) / 16 lb Bond - 90 lb Index (60 - 163gsm)
Dimensions: 8 lbs.
Weight: 16.5" x 19" x 6"

ADDITIONAL OPTIONS

Memory: 512MB DIMM Memory, 1GB DIMM Memory SD Card: 16 / 32GB

Security: Card Authentication Kit (B)
Print Management: ThinPrint (UG-33)

Note:

- 1 At reduced speed
- 2 Requires optional SD Card
- 3 Requires optional Memory or SD Card

Specifications and design are subject to change without notice. For the latest on connectivity visit kyoceradocumentsolutions.us. ECOSYS, PRESCRIBE, Kyocera Net Manager, Kyocera Net Viewer, Kyocera Device Manager, PDF Direct Print, Command Center RX, and KX Driver are trademarks of The Kyocera Companies. Mac OS and AirPrint are trademarks of Apple, Inc. Windows is a trademark of Microsoft, Inc. All other trademarks are the property of their respective owners.







Kyocera Document Solutions Partner

KYOCERA Document Solutions Canada, Ltd. 6120 Kestrel Road, Mississauga, ON L5T 1S8, Canada Tel: 905-670-4425



kyoceradocumentsolutions.ca